

BEST AVAILABLE COPY

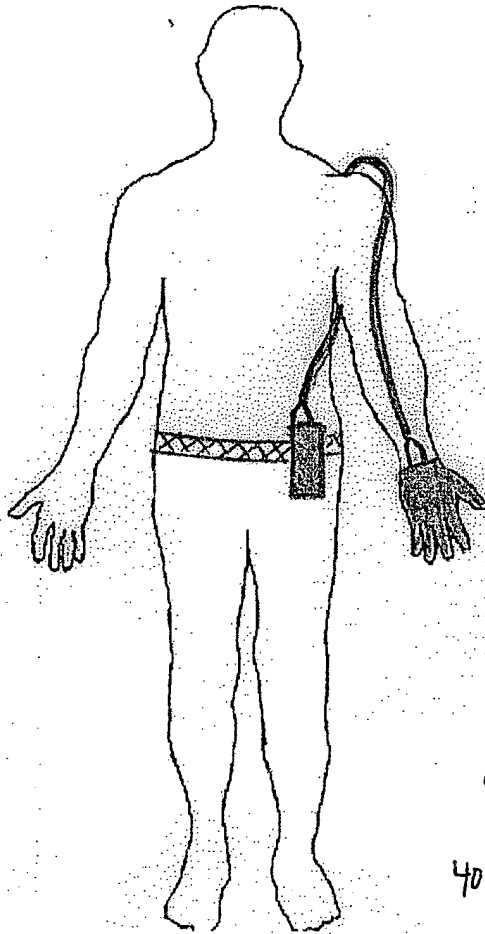


Figure 1A

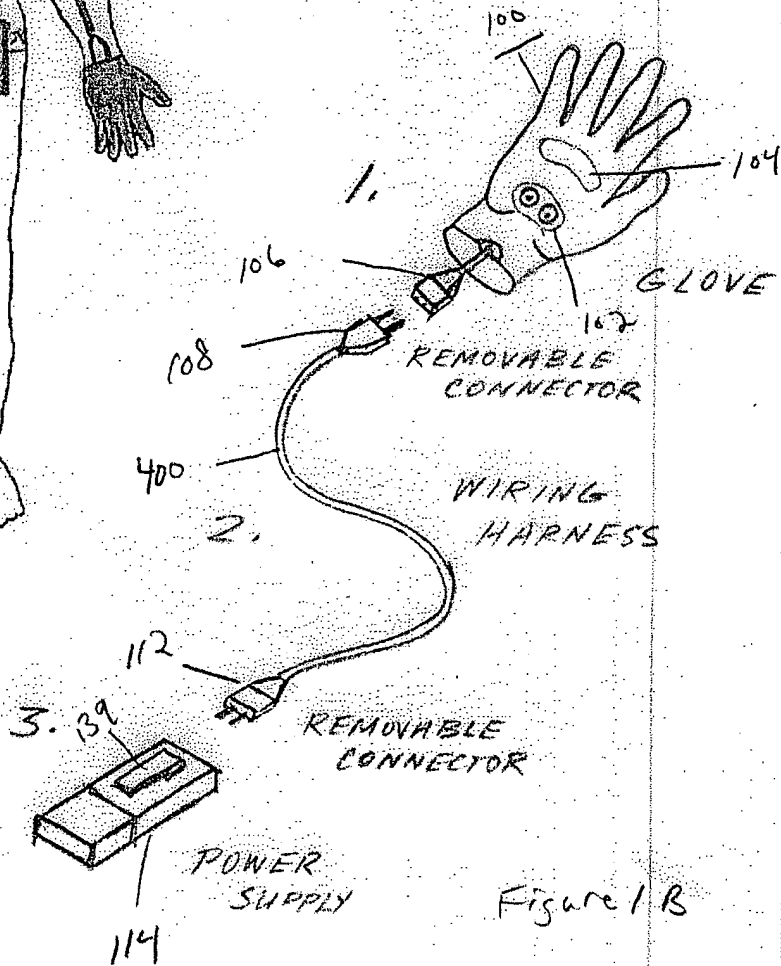


Figure 1B

Fig. 1

OVERALL DESIGN / COMPONENTS

Ara Manukian  
Design Engineer  
ARS-FLORIDA  
59-3386389

BEST AVAILABLE COPY





Figure 2A

Figure 2B

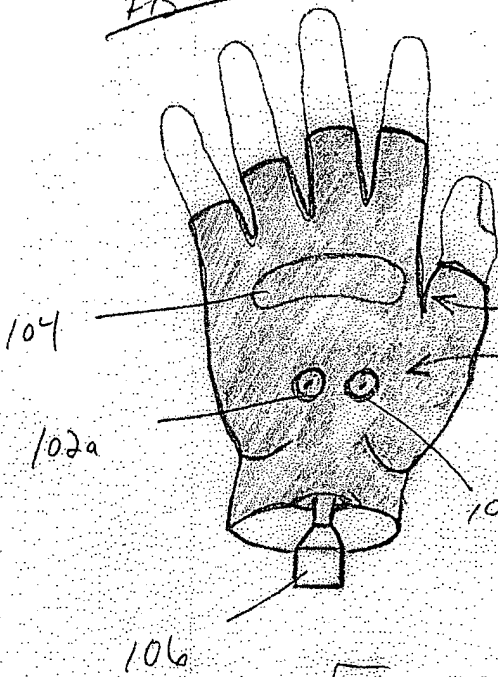

INSIDE PALM

PRESSURE ACTIVATION SWITCHES

HIGH-VOLTAGE ELECTRODES

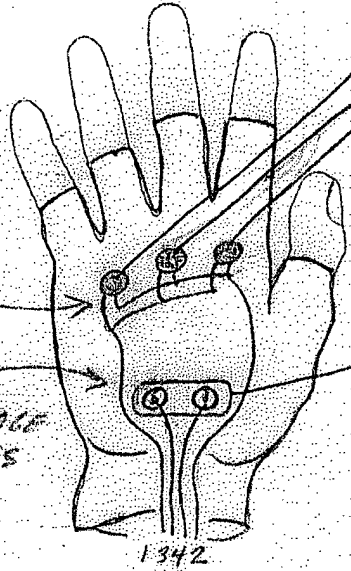


Figure 2C

1 & 2 = SWITCH CIRCUIT

3 & 4 = HIGH VOLTAGE

CONNECTOR 106

Figure 2D


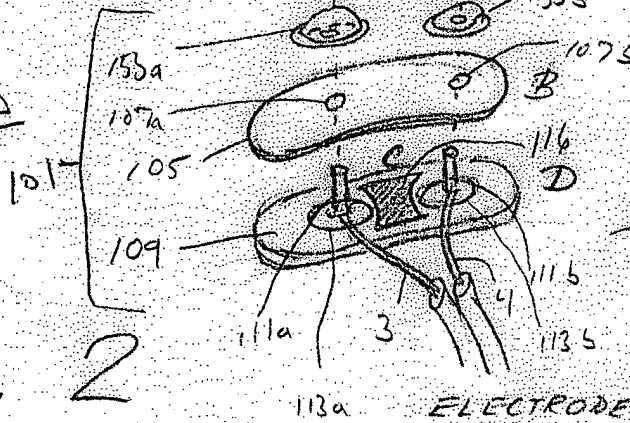


Figure 2E

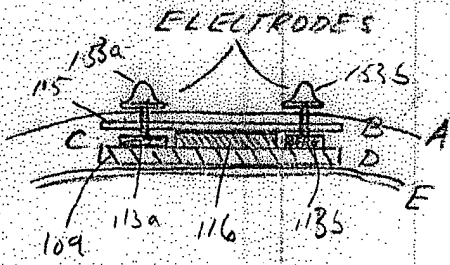

ELECTRODE ASSEMBLY SEWN BETWEEN INNER & OUTER CLOTH LAYERS OF GLOVE

Fig. 2

HAND GLOVE COMPONENTS

Ara Manukian  
Design Engineer  
ARS-FLORIDA  
59-3386389

BEST AVAILABLE COPY

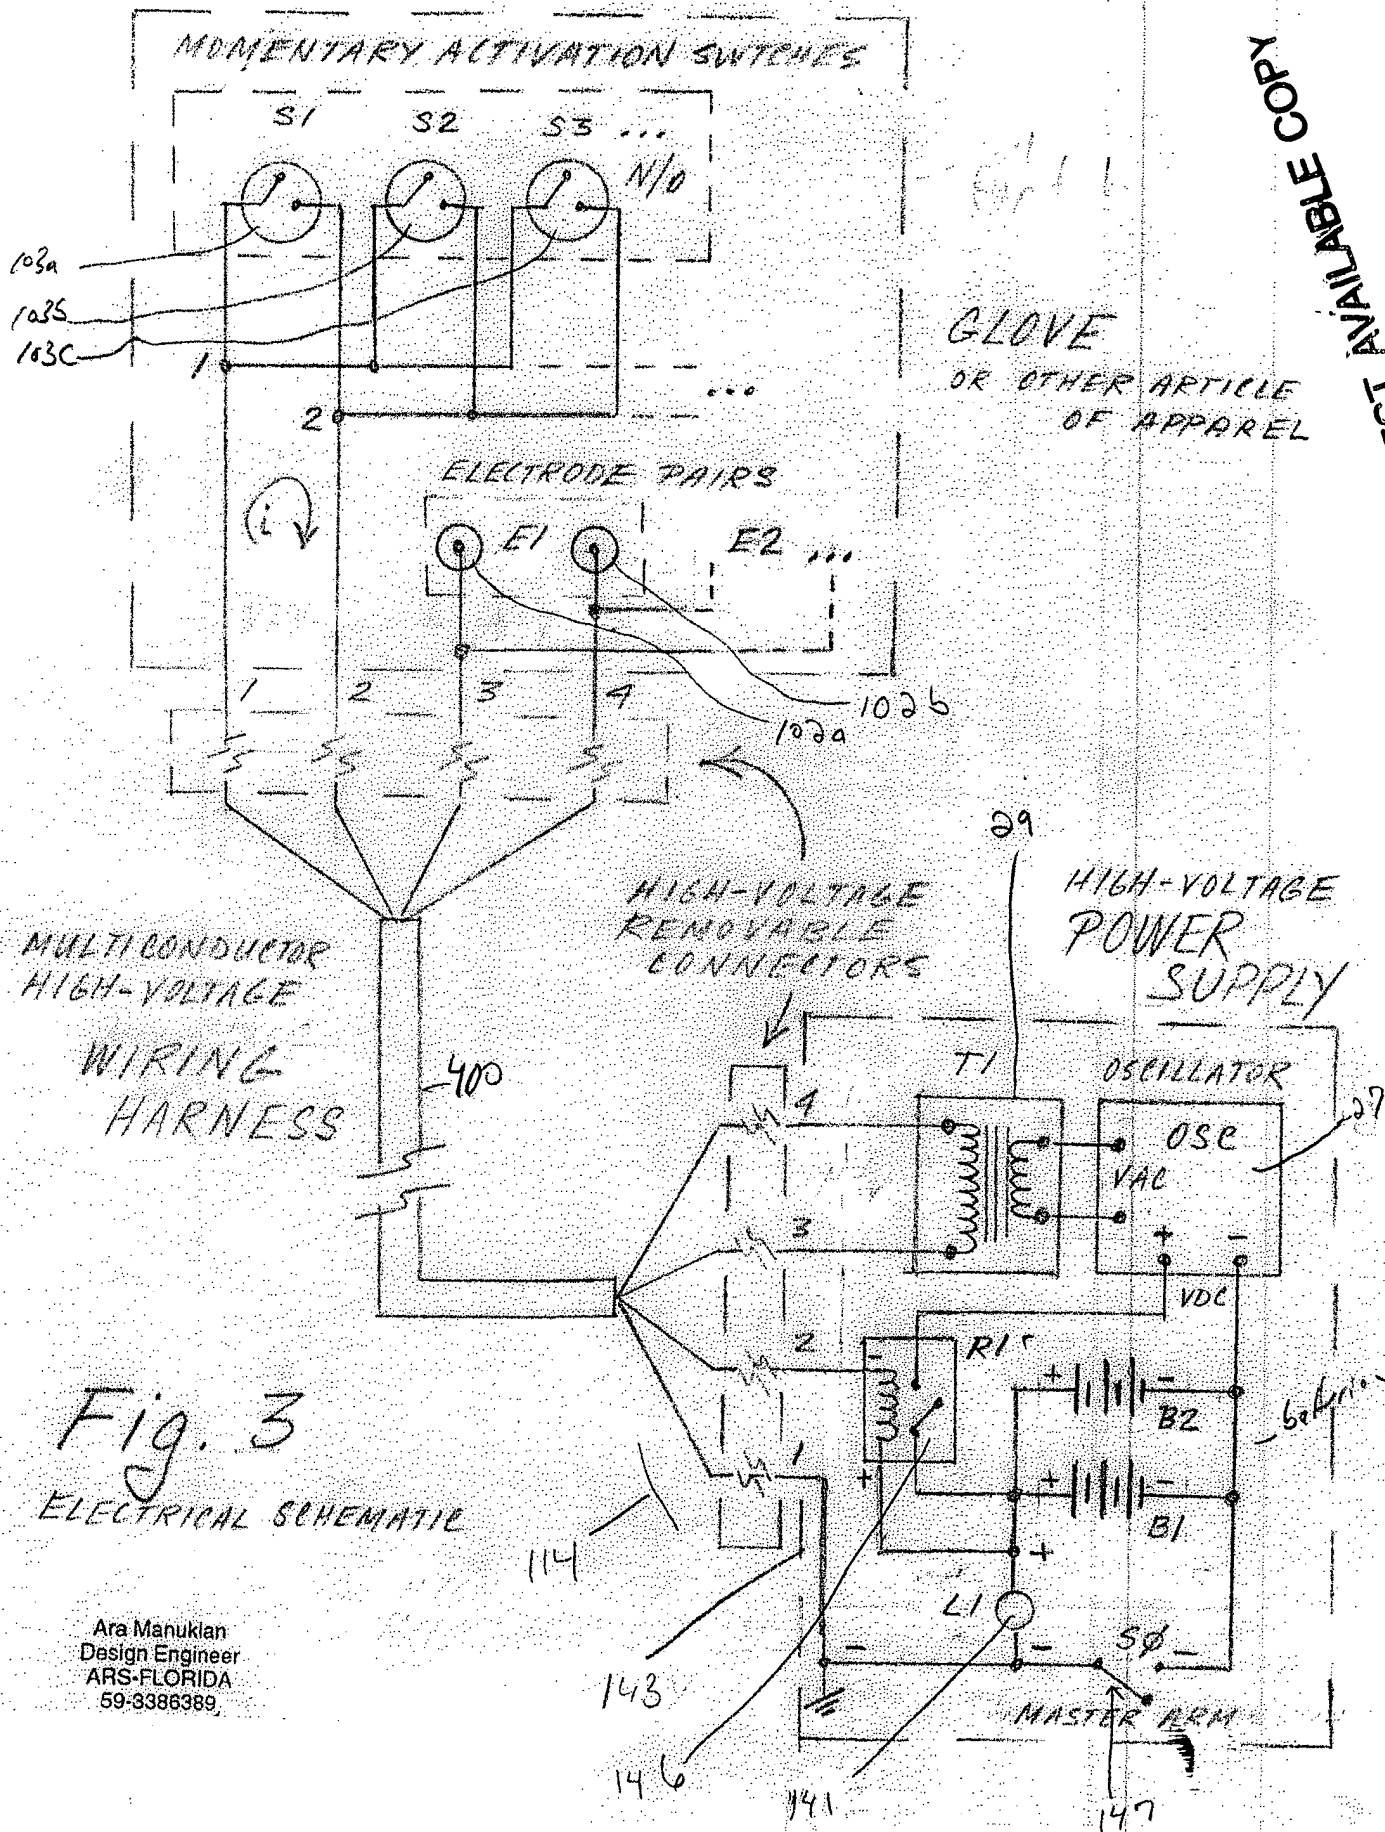


Fig. 3  
ELECTRICAL SCHEMATIC

Ara Manuklan  
Design Engineer  
ARS-FLORIDA  
59-3386389

Fig. 4

HIGH-VOLTAGE CABLE  
(WIRING HARNESS)

BEST AVAILABLE COPY

Fig 4A

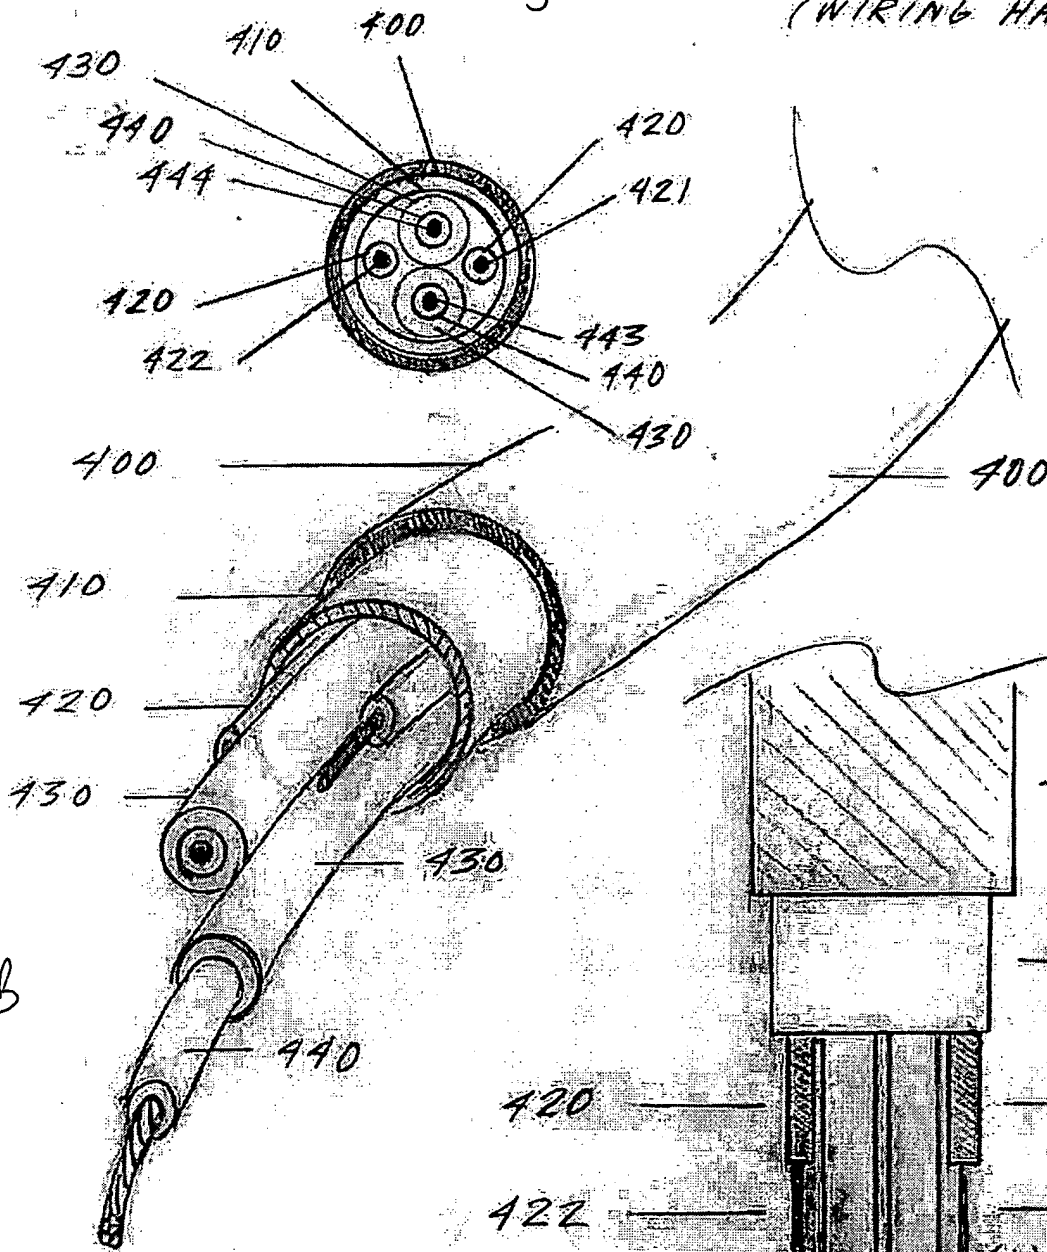


Fig 4B


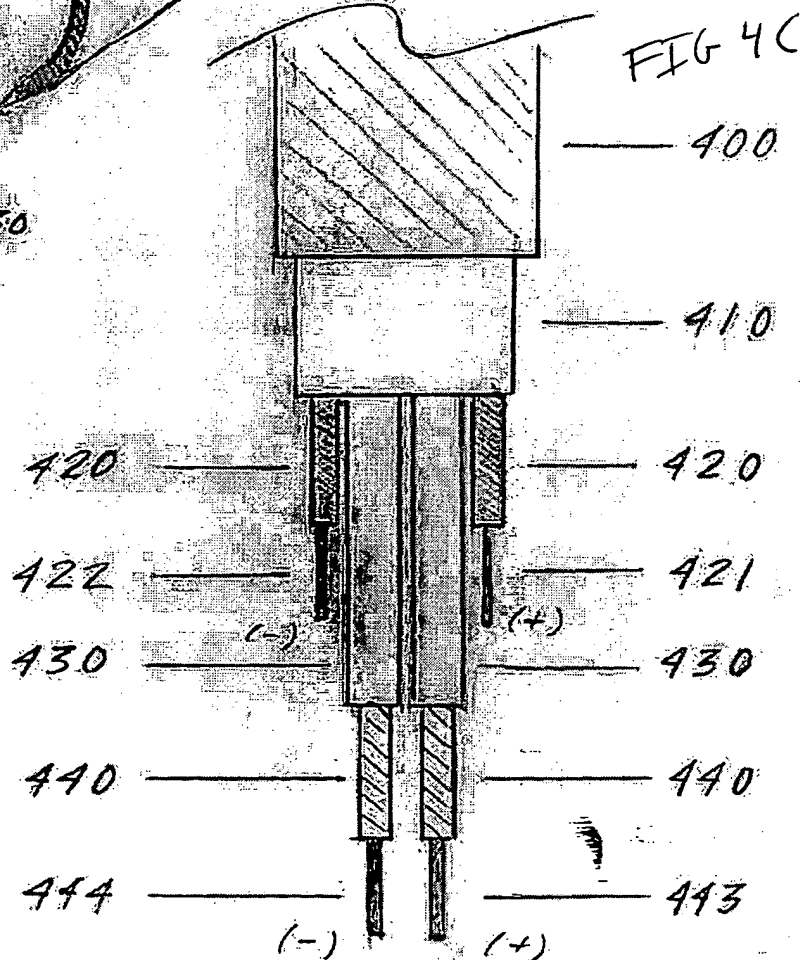


FIG 4C

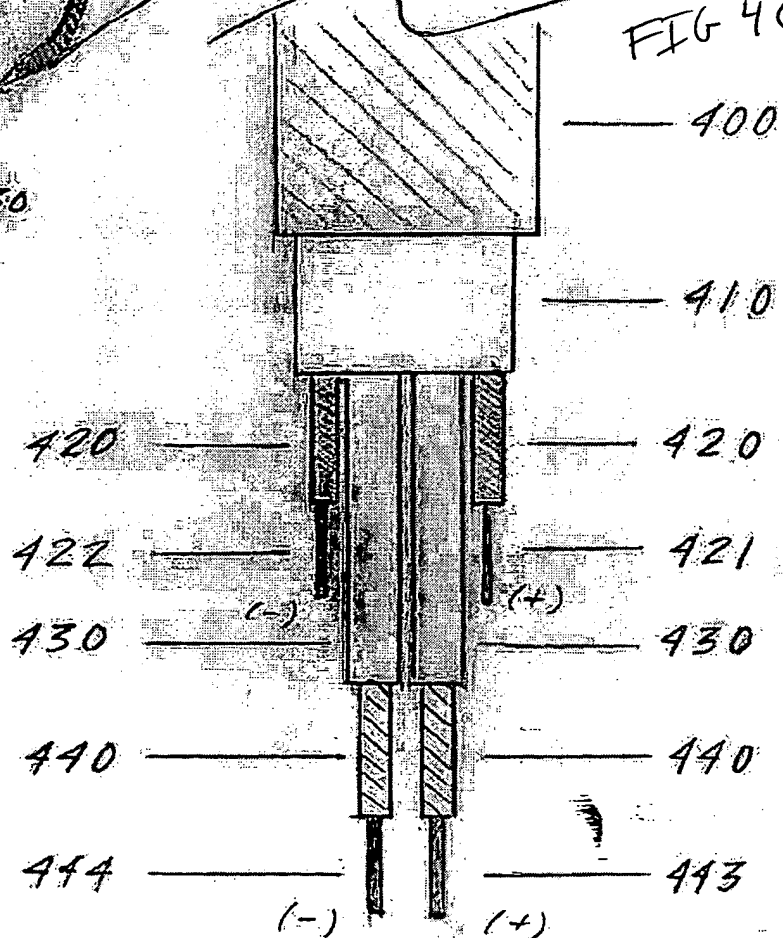

BEST AVAILABLE COPY

→ FROM POWER SUPPLY

MALE CONNECTOR = 500  
 FEMALE CONNECTOR = 600  
 COMBINED M+F = 506

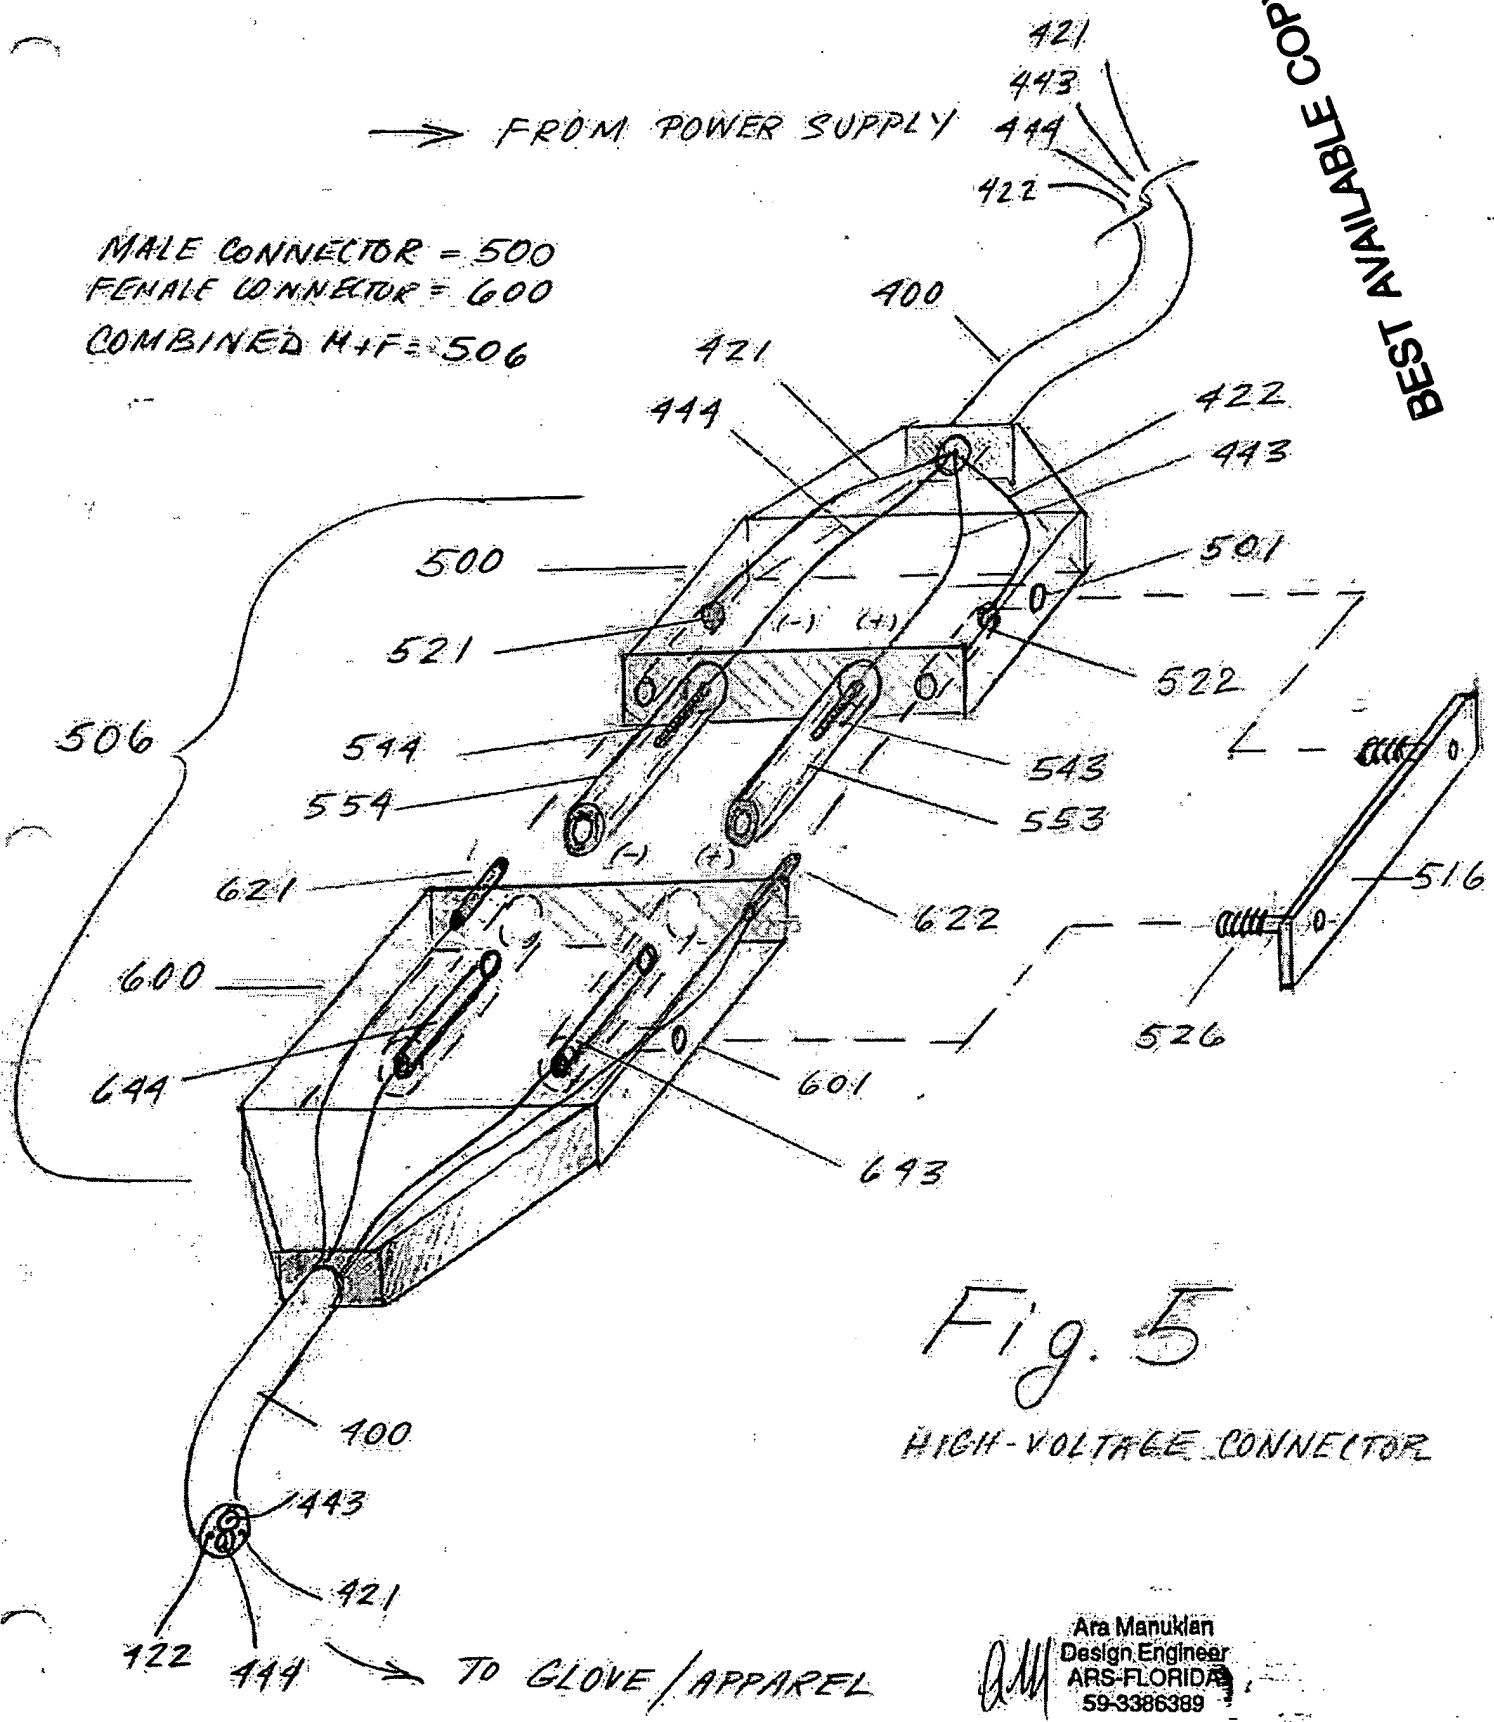


Fig. 5

HIGH-VOLTAGE CONNECTOR

Ara Manukian  
 Design Engineer  
 ARS-FLORIDA  
 59-3386389